




- GENERAL NOTES :**
- THE PURPOSE OF THESE PLANS IS TO :
 - MINIMIZE THE AREA OF DISTURBED SOILS AND TO MINIMIZE THE DURATION THAT ANY AREAS ARE LEFT OPEN.
 - ISOLATE THE AREAS OF DISTURBANCE TO PREVENT AND CONTROL EROSION CAUSED BY RUN-OFF.
 - CONTROL THE AMOUNTS OF SEDIMENT THAT MAY RESULT FROM ANY SITE. EROSION.
 - A COPY OF THE PLAN SET WILL BE AVAILABLE AT THE JOB TRAILER ON-SITE.
 - O'LEARY - BURKE CIVIL ASSOCIATES WILL BE THE ON-SITE COORDINATOR
 - THE ON-SITE COORDINATOR SHALL INSPECT AND KEEP A WRITTEN RECORD OF THE EROSION AND SEDIMENT CONTROL STRUCTURES AND MEASURES AT A MINIMUM OF ONCE A WEEK AND ALSO WITHIN 24 HOURS OF ANY STORM EVENT THAT DISCHARGES RUN-OFF FROM THE SITE.
 - THE ON-SITE COORDINATOR SHALL KEEP A WRITTEN RECORD OF EROSION CONTROL INSPECTIONS AND ANY MONITORING DATA FOR A MINIMUM OF THREE (3) YEARS FOLLOWING COMPLETION OF CONSTRUCTION.
 - A FIELD REPORT FROM EACH INSPECTION SHALL BE PROVIDED TO THE TOWN


INSPECTION SCHEDULE	WEEKLY	AFTER EACH RAINFALL THAT GENERATES STORMWATER FROM SITE
INSPECT SILT FENCING	x	x
INSPECT CONSTRUCTION FENCE	x	x
INSPECT CATCH BASIN INLET PROTECTION	x	x
INSPECT AREAS TEMPORARILY MULCHED	x	x
INSPECT TEMPORARY STOCKPILES	x	x
INSPECT STABILIZED CONSTRUCTION ENTRANCES	x	x
INSPECT AREAS THAT HAVE BEEN TOPSOILED & MULCHED	x	x
INSPECT STORMWATER PONDS AND SEDIMENT TRAPS	x	x

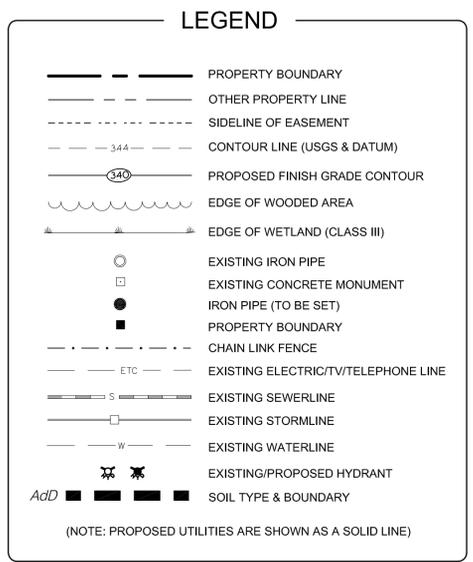

CONSTRUCTION SEQUENCING FOR EROSION PREVENTION & SEDIMENT CONTROL

THE ON-SITE COORDINATOR SHALL INSPECT THE SITE AND THE SEDIMENT CONTROL MEASURES A MINIMUM OF ONCE EVERY SEVEN DAYS, PRIOR TO PREDICTED STORM EVENTS AND WITHIN 24 HOURS FOLLOWING ANY PRECIPITATION WITH A VOLUME LARGE ENOUGH TO DISCHARGE RUN-OFF FROM THE SITE. DURING WINTER CONSTRUCTION THE ON-SITE COORDINATOR IS TO INSPECT THE SITE ON A DAILY BASIS DURING ANY THAW PERIODS THAT PRODUCE RUNOFF FROM THE SITE. THE WEEKLY REPORT WILL BE KEPT ON-SITE. ALL REPORTS SHALL BE SUBMITTED TO THE TOWN OF HINESBURG.

CONSTRUCTION OF NEW DRIVE AND RETAIL STORE			
TIMETABLE	MAJOR CONSTRUCTION ITEM	EROSION CONTROL	MAINTENANCE
1.	PRE-CONSTRUCTION MEETING WITH TOWN OF HINESBURG		
2.	MARK LIMITS OF AREA TO BE DISTURBED.	INSTALL CONSTRUCTION FENCING AT LOCATIONS SHOWN ON PLAN.	MAINTAIN UNTIL CONSTRUCTION IS COMPLETED.
3.	INSTALL SILT FENCING AND STABILIZED CONSTRUCTION ENTRANCE	INSTALL SILT FENCING AND STABILIZED CONSTRUCTION ENTRANCE AT LOCATIONS SHOWN ON PLAN.	MAINTAIN SILT FENCE AND REMOVE DEPOSITS OF SILT. REMOVE AND REPLACE STONE AT ENTRANCE AS ORDERED BY THE ON-SITE COORDINATOR.
4.	GRUBBING AND TOPSOIL STOCKPILING	ANY STUMPS ARE TO BE DISPOSED OF AT AN APPROVED DISPOSAL SITE. A SILT FENCE IS TO BE INSTALLED AROUND THE BASE OF ANY STOCKPILE. STOCKPILES ARE TO BE SEEDED AND MULCHED WITHIN 48 HOURS OF PLACEMENT.	THE SILT FENCE IS TO BE MAINTAINED UNTIL THE STOCKPILE HAS BEEN REMOVED. IN-USE AREAS OF THE STOCKPILE ARE TO BE RESEDED AND REMULCHED IF OPEN AND UNUSED FOR MORE THAN A WEEK.
5.	CONSTRUCTION OF STORMWATER SYSTEM	DISTURBED AREAS TO BE SEEDED, MULCHED AND EROSION BLANKET APPLIED WITHIN 7 DAYS OF DISTURBANCE.	DISTURBED AREAS ARE TO BE INSPECTED WEEKLY OR IMMEDIATELY FOLLOWING A RUN-OFF PRODUCING STORM.
6.	CONSTRUCTION OF UTILITY LINES WITHIN ROW	DISTURBED AREAS TO BE SEEDED, MULCHED AND EROSION BLANKET APPLIED WITHIN 7 DAYS OF DISTURBANCE.	REMOVE SEDIMENT AND REPLACE STONE AS NECESSARY.
7.	CONSTRUCTION OF PRIVATE DRIVEWAY		
8.	SEEDING AND MULCHING OF COMPLETED AREAS	AREAS THAT ARE FINISH GRADED ARE TO BE SEEDED AND MULCHED WITHIN 48 HOURS.	

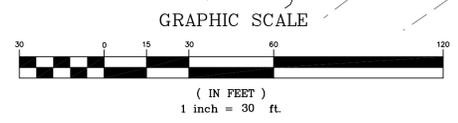

DATE 7-20-11	REVISION PLAN CHANGES PER HINESBURG COMMENTS	BY PJO
SURVEY OTHERS	□ RECORD DRAWING □ PRELIMINARY	DATE 11-09-10
DESIGN DJS	□ FINAL □ SKETCH/CONCEPT	JOB# 9066
DRAWN PJO	O'LEARY-BURKE CIVIL ASSOCIATES, PLC	FILE CURRENT
CHECKED DWB	1 CORPORATE DRIVE, SUITE #1 ESSEX JCT., VT PHONE: 878-9989 FAX: 878-9989 E-MAIL: obca@olearyburke.com	PLAN SHEET #
SCALE 1"=30'	Hannaford Supermarket & Pharmacy Commercer Street Hinesburg, VT	C8
	Lot 15 Erosion Control Plan	