




**PROPOSED**  
36,000 SF ±  
SUPERMARKET  
FPE= 346.0'

INSPECTION SCHEDULE	
WEEKLY	AFTER EACH RAINFALL THAT GENERATES STORMWATER RUNOFF FROM THE SITE
INSPECT SILT FENCING	X
INSPECT CONSTRUCTION FENCE	X
INSPECT CATCH BASIN INLET PROTECTION	X
INSPECT AREAS TEMPORARILY MULCHED	X
INSPECT AREAS TEMPORARILY MULCHED	X
INSPECT TEMPORARY STOCKPILES	X
INSPECT STABILIZED CONSTRUCTION ENTRANCES	X
INSPECT AREAS THAT HAVE BEEN TOPSOILED & MULCHED	X
INSPECT STORMWATER POUNDS AND SEDIMENT TRAPS	X

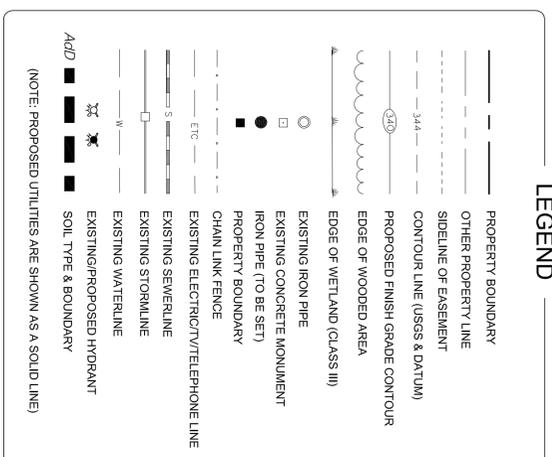

- ### GENERAL NOTES :
- THE PURPOSE OF THESE PLANS IS TO:
    - MINIMIZE THE AREA OF DISTURBED SOILS AND TO MINIMIZE THE DURATION THAT ANY AREAS ARE LEFT OPEN.
    - ISOLATE THE AREAS OF DISTURBANCE TO PREVENT AND CONTROL EROSION CAUSED BY RUN-OFF.
    - CONTROL THE AMOUNTS OF SEDIMENT THAT MAY RESULT FROM ANY SITE EROSION.
  - A COPY OF THE PLAN SET WILL BE AVAILABLE AT THE JOB TRAILER ON-SITE.
  - ON-ENTRY - BURKE CIVIL ASSOCIATES WILL BE THE ON-SITE COORDINATOR.
  - THE ON-SITE COORDINATOR SHALL INSPECT AND KEEP A WRITTEN RECORD OF THE EROSION AND SEDIMENT CONTROL STRUCTURES AND MEASURES AT A MINIMUM OF ONCE A WEEK AND ALSO WITHIN 24 HOURS OF ANY STORM EVENT THAT DISCHARGES RUN-OFF FROM THE SITE.
  - THE ON-SITE COORDINATOR SHALL KEEP A WRITTEN RECORD OF EROSION CONTROL COMPLETION OF CONSTRUCTION.
  - A FIELD REPORT FROM EACH INSPECTION SHALL BE PROVIDED TO THE TOWN.

### CONSTRUCTION SEQUENCING FOR EROSION PREVENTION & SEDIMENT CONTROL

THE ON-SITE COORDINATOR SHALL INSPECT THE SITE AND THE SEDIMENT CONTROL MEASURES A MINIMUM OF ONCE EVERY SEVEN DAYS, PRIOR TO PREDICTED STORM EVENTS AND WITHIN 24 HOURS FOLLOWING ANY PRECIPITATION WITH A VOLUME LARGE ENOUGH TO DISCHARGE RUN-OFF FROM THE SITE. DURING WINTER CONSTRUCTION IS TO INSPECT THE SITE ON A DAILY BASIS DURING ANY THAW PERIODS THAT PRODUCE RUN-OFF FROM THE SITE. THE WEEKLY REPORT WILL BE KEPT ON-SITE. ALL REPORTS SHALL BE SUBMITTED TO THE TOWN OF HINESBURG.

THREATABLE	MAJOR CONSTRUCTION ITEM	EROSION CONTROL	MAINTENANCE
	1. PRE-CONSTRUCTION MEETING WITH TOWN OF HINESBURG		
	2. MARK LIMITS OF AREA TO BE DISTURBED.		
	3. INSTALL SILT FENCING AND STABILIZED CONSTRUCTION ENTRANCE AT LOCATIONS SHOWN ON PLAN.	INSTALL CONSTRUCTION FENCING AT LOCATIONS SHOWN ON PLAN.	MAINTAIN UNTIL CONSTRUCTION IS COMPLETED.
	4. GRUBBING AND TOPSOIL STOCKPILING	INSTALL SILT FENCING AND STABILIZED CONSTRUCTION ENTRANCE AT LOCATIONS SHOWN ON PLAN.	MAINTAIN SILT FENCE AND REMOVE DEPOSITS OF SILT, REMOVE AND REPLACE STONE AT ENTRANCE AS ORDERED BY THE ON-SITE COORDINATOR.
	5. CONSTRUCTION OF STORMWATER SYSTEM	ANY STOCKPILES ARE TO BE DISPOSED OF AT AN APPROVED DISPOSAL SITE.	THE SILT FENCE IS TO BE MAINTAINED UNTIL THE STOCKPILE HAS BEEN REMOVED. INSURE AREAS OF THE STOCKPILE ARE TO BE UNCOVERED ONCE THE STOCKPILE IS REMOVED.
	6. CONSTRUCTION OF UTILITY LINES WITHIN ROW	DISTURBED AREAS TO BE SEEDED, MULCHED AND MULCHED WITHIN 48 HOURS OF PLACEMENT.	DISTURBED AREAS ARE TO BE INSPECTED WITHIN 24 HOURS OF PLACEMENT AND REMOVE RUN-OFF PRODUCING STORM.
	7. CONSTRUCTION OF PRIVATE DRIVEWAY	DISTURBED AREAS TO BE SEEDED, MULCHED AND MULCHED WITHIN 48 HOURS OF PLACEMENT.	REMOVE SEDIMENT AND REPLACE STONE AS NECESSARY.
	8. SEEDING AND MULCHING OF COMPLETED AREAS	AREAS THAT ARE FINISH GRADED ARE TO BE SEEDED AND MULCHED WITHIN 48 HOURS.	

DATE: 4-26-12	REVISION: REVISED BUILDING FOOTPRINT, PARKING LAYOUT, BOUNDARY LINE ADJUSTMENT	BY: BB
SUBMITTER: OTHERS	DESIGN: RECORD DRAWING	DATE: 11-09-10
DESIGNER: PLO	SCALE: 1"=50'	DATE: 03-06
CREATED: DMB	SCALE: 1"=50'	DATE: 03-06
<b>OLEARY-BURKE CIVIL ASSOCIATES, PLC</b> 10 CORPORATE DRIVE, SUITE #7 HINESBURG, VT 05743 TEL: 802.898.0889 FAX: 802.898.0889 EMAIL: OLEARY@OLEARYBURKE.COM		<b>Hannaford Supermarket &amp; Pharmacy</b> Commerce Street Hinesburg, VT Lot 15 Erosion Control Plan PLAN SHEET # <b>C8</b>

