


Architrac Series 94001 Track

- Separate channels for operating equipment and carriers which hold draperies.
- Will accommodate Ripplefold® and standard pleated draperies.
- Remove and add slides with snap open end gate.

Description


- For wall or ceiling mounting.
- Dual-channel, cord operated.
- Extruded .050" No. 6063T5 aluminum alloy, etched and anodized.
- White baked enamel finish.
- Two end pulleys to choose from for either lightweight or heavyweight draperies.
- Multiwheel roller-bearing masters prevent any binding and give easy traversing.

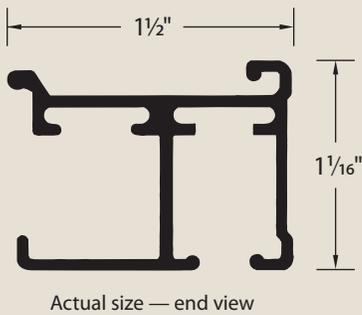


Applications

Mounts on wall or ceiling (flush or recess). For spans up to 40' in a two-way draw. Track can be curved. This track series will accommodate Ripplefold® and conventional pleated drapery heading systems.


Brackets




No. 94130
Bracket for ceiling mounting

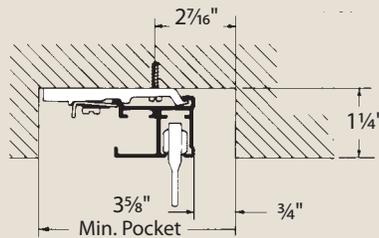


No. 94130
Bracket for recess mounting

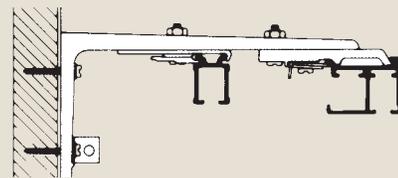

No. 94125
Double bracket for wall mounting





No. 94122
Bracket for wall mounting
3 1/2" return

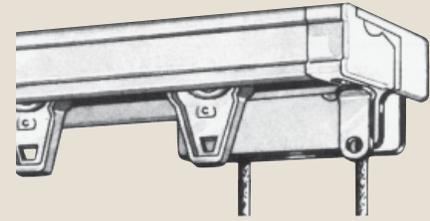


Component Parts

Standard Pulley set Nos. 94119 and 94120



1/2" diameter Teflon® bearings for standard weight draperies where minimum stackback and uniform folding to the end of the rod is desired.

Heavy Duty Pulley set Nos. 94101 and 94102




1" diameter heavy duty ball bearing pulley sets for heavier installations, larger spans.

Requires use of rod notching tool No. 9997

Conventional Heading Systems


Master Carriers for conventional pleated draperies
Nos. 94104 and 94103

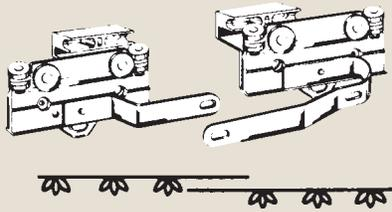

Multiwheel roller-bearing masters. Regardless of torque, master rollers won't bind.

Optional Operational Components

Butt Master Carriers
Nos. 94118 and 94117

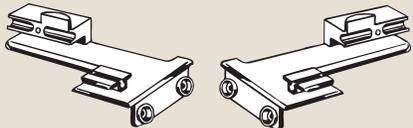


94118
Left hand

94117
Right hand

Drapery panels butt together at center. 
No flat areas or overlap shadow.

Overlap Master Carriers
Nos. 94116 and 94115

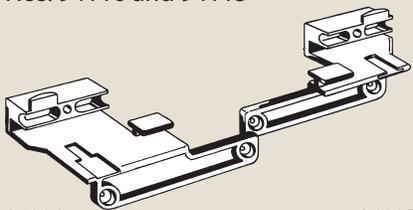


94116
Left hand

94115
Right hand

Drapery panels overlap at center. 

Assembled Sets



Set includes assembled rod, 94122 wall or 94130 ceiling brackets and 9923 cord tension pulley; longer brackets can be ordered separately. Rod may be angular bent or circular curved.

Brackets:
Wall or ceiling mount.

Draperies:
Pinch Pleat, Ripplefold® (butt or overlap masters and fullness).

Fabrication and Planning Guides:
Ripplefold®-Tape: refer to F0337008

Set with 1" end pulley

No. 94270H
Finish (25) White, Baked Enamel

Set with ½" end pulley

No. 94270
Finish (25) White, Baked Enamel

Suggested Specifications

- Furnish and install, as indicated on plans, Kirsch Track No. 94001, extruded of .050" 6063T5 aluminum alloy in accordance with Aluminum Association Specification. No.AA-C22A21. Finish (25) White, Baked Enamel
- Specify Mounting Brackets and Quantity
 - Ceiling
 - Wall – Single Track
 - Wall – Double Track
- Specify Drapery System and Fullness
 - Standard Pleated
 - Ripplefold® 120%, 100%, 80%, 60%
- Specify Master
 - Butt Master
 - Overlap Master
- End Pulley Options
 - ½" Teflon® Bearing
Nos. 94119 and 94120
 - 1" H.D. Ball Bearing
Nos. 94101 and 94102
- No. 9934 polyester cord, used with ½" Teflon® end and 1" ball bearing end pulley set.
- Tension Pulley to be No. 9923