Bruce G. Schulman
Hinesburg, Vt.

PROPOSAL TO TOWN OF HINESBURG OCT.16, 2012

SUBJECT: walnut table

Construct conference table using walnut lumber provided by the town;
hardware , finishing materials, misc. to be supplied by Bruce
Approximate overall dimensions: 36"(42 o.c.) x 14 feet x 30" tall ; 4 legs at corners plus one leg under the center point, boards to run longitudinally
Proposed finish : 3 coats high grade polyurethane, satin finish
Deliver and install on site, upstairs at town hall, included, approx. 4 hours
To deliver upstairs, the top will be in two sections approx. 7 ft. in length, with a dry spline joint at the center, using concealed tight joint fasteners; the apron assembly will be constructed using single boards for the length(no break),delivered as one unit, legs to be bolted up on site, and top sections joined and applied

Option 1 $2350.
Rectangular top, thick as possible, approx. 1.2", rectangular apron , square legs, approx.3.5 inch sq.

Option 2 $2550.
Same as above with tapered legs

Option 3 $2800.
Tapered table top approx 36" wide at ends and 42" wide at center line , linear cuts, Rectangular apron

Option 4 $3350.
Lozenge shape top, curved ends, curved apron boards along long axis, square apron on ends, leg construction would be approx. 4.5" sq. , glued up core with walnut exterior boards, open lap joints at corners

Sales tax n/a
Details can be changed to meet your requirements
Thank you

Bruce
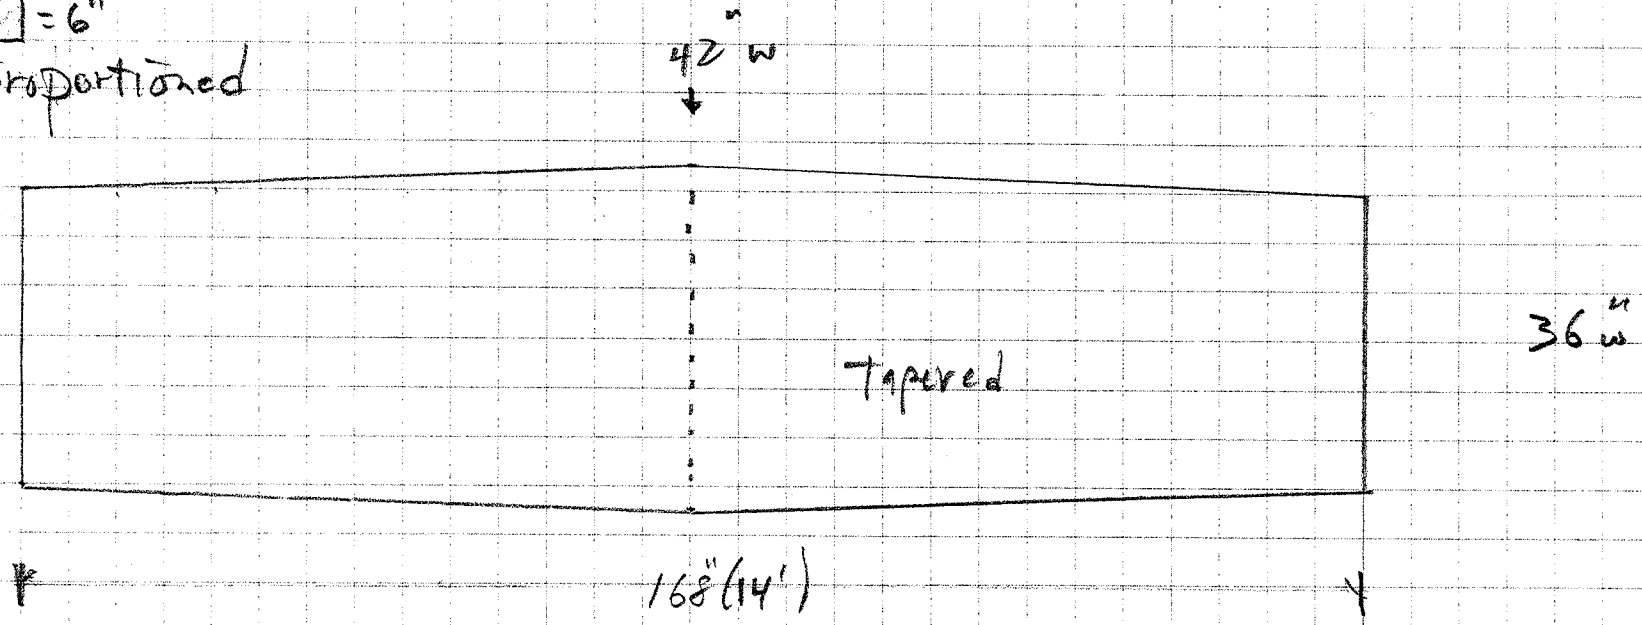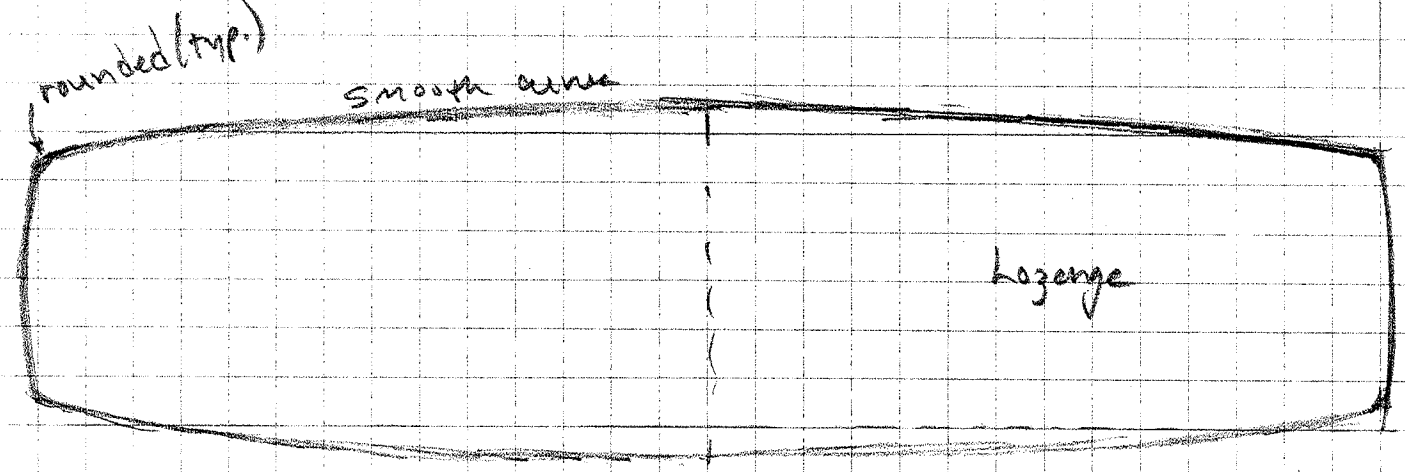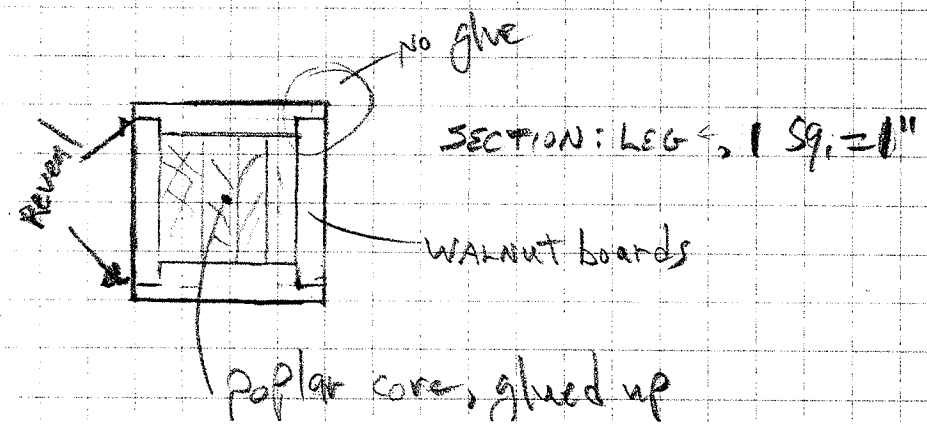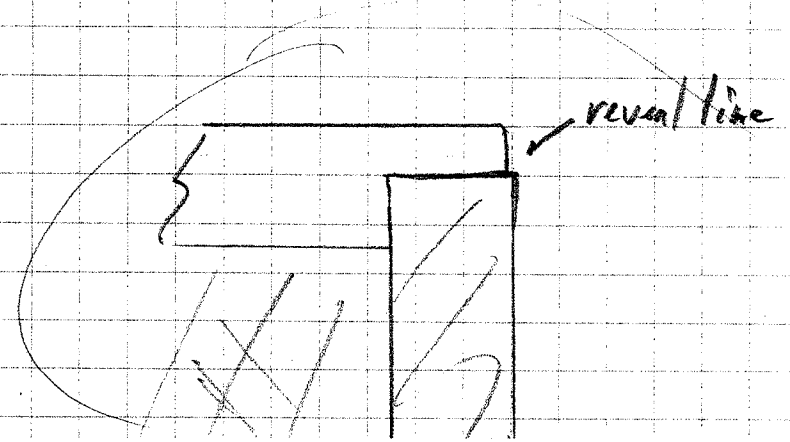
□ = 6"
proportioned